

VANDAL PROOF DOME CAMERA

KVC-612, KVC-624

3-AXIS, VANDAL PROOF DOME CAMERA



IP66



- FEATURES -

- 1/3" Dramatically dynamic range sensor
- 550TV Lines Horizontal Resolution
- Low Light Sensitivity of 0.08 Lux/F1.2 (DSS on)
- OSD Built-in
- Vandal Proof Dome Housing
- IP-66 Weatherproof Type
- Dome size : Φ 100mm

* **KVC-612** : DC 12V


* **KVC-624** : DC 12V / AC 24V (Dual Voltage)

Option

- Varifocal Lens : 4.0~9.0mm DC / 2.8~11.0mm DC



- DIMENSION -

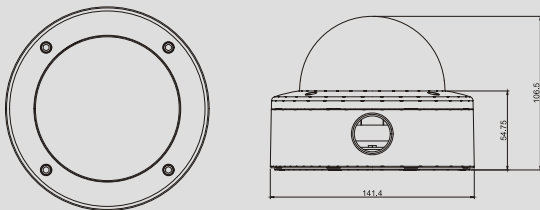

- 3 AXIS GIMBAL BRACKET -



- Camera Rotation : 360°
- Tilt Rotation : 100°
- Pan Rotation : 270°

- WALL MOUNT BRACKET -



MBR-401WM

- SPECIFICATION -

KVC-612 / KVC-624		
Signal Format	NTSC	PAL
Horizontal Resolution	550TV lines	
Image Sensor	1/3" Dramatically dynamic range sensor	
Scanning Frequency	15.734KHz(H), 59.94(V)	15.625KHz(H), 50.00(V)
Synchronization	Internal	
Video Output	Standard composite 1Vp-p composite video into 75 Ω	
Min. Illumination	Color : 0.4Lux/F1.2, (Sense-up 32x 0.08Lux)	
Electronic Shutter	1/60 ~ 1/100,000 sec Auto	1/50 ~ 1/100,000 sec Auto
Signal to Noise Ratio	More than 50dB	
Day & Night	D&N Function by Digital Change : AUTO / OFF / ON	
White Balance	AUTO / ATW DESAT / AWC / MANUAL	
DSS	OFF / 2 Fields ~ 32 Fields	
DNR	ON / OFF	
Flip	OFF / H.FLIP / V.FLIP / H-H.FLIP	
AGC	LOW / MIDDLE / HIGH	
Camera ID	ON / OFF	
Wide Dynamic Range	Max 120dB / 17-bit	
Privacy Zones	OFF / ON (White, Black, Red)	
Input Voltage	DC 12V (8V - 18V), AC 24V (20V-30V)	
Operating Temperature	-10°C to +55°C	
Storage Temperature	-20°C to +70°C	
Operating Humidity	Under 90% Non-condensing	
Storage Humidity	Under 90% Non-condensing	
Dimension	141.4(Φ) x 106.5(H)mm	
Weight	770g	