

# VANDAL PROOF DOME CAMERA

## SVM-3242HS

### 600TV LINES VANDAL PROOF DOME CAMERA



#### - FEATURES -

- 1/3" SONY DSP Super HAD High-Resolution B/W CCD
- 600TV Lines
- Min. Illumination : 0.02Lux
- Auto White Balance
- Board Lens : 3.6mm
- Vandal Proof Dome Housing
- IP-66 Weatherproof Type
- Dome size :  $\Phi 97$ mm

#### Option

- Dual Voltage (AC 24V / DC 12V)
- Varifocal Lens : 4.0~9.0mm




1/3 SONY DSP Super HAD CCD



B/W



VANDAL PROOF



BOARD LENS




AUTO-IRIS



DC 12V

#### - DIMENSION -

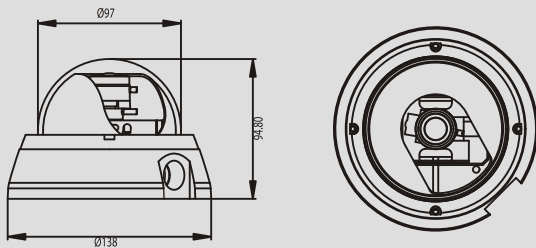

#### - 3 AXIS GIMBAL BRACKET -



- Camera Rotation : 360°
- Tilt Rotation : 100°
- Pan Rotation : 270°

#### - WALL MOUNT BRACKET -



MBR-SVCBR

#### - SPECIFICATION -

SVM-3242HS		
Signal Format	EIA	CCIR
Horizontal Resolution	600TV Lines	
Image Sensor	1/3" SONY Hi-Resolution Super HAD B/W CCD	
Scanning System	525 lines interlaced	625 lines interlaced
Synchronization	Internal	
Video Output	Standard composite 1Vp-p composite video into 75 $\Omega$	
Min. Illumination	0.02Lux	
Signal to Noise Ratio	45dB or more (AGC Off)	
Gamma	0.45	
AGC	On	
Input Voltage	DC 12V ( $\pm 10\%$ ), 1.8W	
Housing Material	Vandal Proof Dome	
Operating Temperature	-10°C to +55°C	
Operating Humidity	Under 85% Non-condensing	
Lens	Board Lens 3.6mm/F2.0	
Dimension	138( $\Phi$ ) x 94.8(H)mm	
Weight	Approx. 690g	
Option	Gimbal Bracket, Varifocal Lens (2~6mm, 4~9mm), AC 24V / DC 12V (Dual Voltage), Bracket	