

## DOME CAMERA

# TDC-3242HQ

## 480TV LINES COLOR DOME CAMERA



### - FEATURES -

- 1/3" SONY DSP Super HAD High-Resolution CCD
- 550TV Lines Horizontal Resolution
- Excellent Low Light Sensitivity of 0.1Lux
- S/W Day&Night
- Auto White Balance
- Vari-focal Lens : 2.8~11.0mm/F1.4
- 3-AXIS Gimbal bracket

\* TDC-3242HQD1 : Board Lens 3.6mm,  $\Phi$ 100 Dome Type

### Option

- Dual Voltage (AC 24V / DC 12V)



1/3 SONY DSP  
Super HAD CCD



COLOR



DAY & NIGHT



Auto / IRIS




Varifocal LENS



DC 12V

### - DIMENSION -

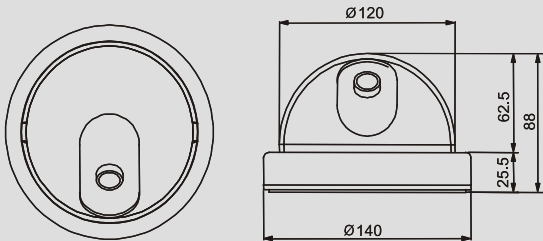

### - 3 AXIS GIMBAL BRACKET -



### - SPECIFICATION -

TDC-3242HQ		
Signal Format	NTSC	PAL
Horizontal Resolution	550TV Lines	
Image Sensor	1/3" SONY DSP Super HAD CCD	
Scanning System	525 lines interlaced	625 lines interlaced
Synchronization	Internal	
Video Output	Standard composite 1Vp-p composite video into 75 $\Omega$	
Min. Illumination	0.1Lux	
Signal to Noise Ratio	45dB or more (AGC Off)	
Gamma	0.45	
AGC	On	
Input Voltage	DC 12V ( $\pm$ 10%), 1.2W	
Housing Material	Plastic Dome	
Operating Temperature	-10°C to +55°C	
Operating Humidity	Under 85% Non-condensing	
Lens	Varifocal Lens : 2.8~11.0mm	
Dimension	140( $\Phi$ ) x 88(H)mm	
Weight	Approx. 690g	
Option	3-Axis Gimbal Bracket, AC 24V / DC 12V (Dual Voltage) Varifocal Lens : 4.0~9.0mm	