

DOME CAMERA

TDC-3242HQS

550TV LINES COLOR DOME CAMERA



- FEATURES -

- 1/3" SONY DSP Super HAD High-Resolution CCD
- 550TV Lines Horizontal Resolution
- Excellent Low Light Sensitivity of 0.3Lux (50IRE, AGC High, DNR High), 0.002Lux (Sens-up x128)
- Auto Day & Night On
- User-Friendly Dip Switch
- OSD Built-in
- Varifocal Lens : 2.8~11.0mm/F1.4



1/3 SONY DSP Super HAD CCD



Color



Day & Night



Sens-up 0.002Lux



Auto / IRIS



Electronic shutter




Varifocal LENS



DC 12V

- DIMENSION -

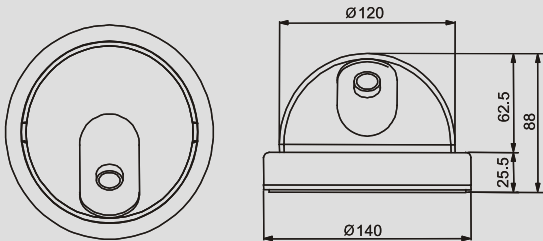

- 3 AXIS GIMBAL BRACKET -



- Camera Rotation : 360°
- Tilt Rotation : 100°
- Pan Rotation : 270°

- SPECIFICATION -

TDC-3242HQS		
Signal Format	NTSC	PAL
Horizontal Resolution	550TV Lines	
Image Sensor	1/3" Interline Transfer CCD	
Scanning System	2:1 Interlace	
Synchronization	Internal / Line-Lock	
Video Output	Standard composite 1Vp-p composite video into 75Ω	
Min. Illumination	0.3Lux/F1.2 (50IRE); Color / 0.002Lux/F1.2 (50IRE)	
Signal to Noise Ratio	50dB (AGC Off, Weight On) Confirm the E/S step	
Electronic shutter	ESC (x128~1/60~1/20000sec)	
Day & Night	On, Auto (Day : Color, Night : B/W)	
OSD Control	IRIS, White Balance, DNR, Electronic shutter, Privacy, Camera Title, Back Light Compensation	
Input Voltage	DC 12V (±10%), MAX 2.0W	
Housing Material	Vandal Proof Dome	
Operating Temperature	-10°C to +55°C	
Operating Humidity	Under 85% Non-condensing	
Lens	Varifocal Lens : 2.8~11.0mm/F1.4	
Dimension	140(Φ) x 88(H) mm	
Weight	Approx. 690g	
Option	3-Axis Gimbal Bracket, Varifocal Lens (4.0~9.0mm) AC 24V / DC 12V (Dual Voltage), OSD control board	