

## IR LED CAMERA

# TEC-S30QL

## IP66/30 IR LED CAMERA



### IP66



#### - FEATURES -

- 1/3" SONY High-Resolution Super HAD CCD
- 540TV Lines Horizontal Resolution
- Excellent low light sensitivity of 0.3Lux/F1.2 (LED On : 0Lux)
- 30pcs IR LED for night vision
- Visibility Range : 25~30m
- Day & Night
- Varifocal Lens f=4.0~9.0mm
- IP66 Weatherproof type
- Cable location in the bracket
- Adjustable lens without opening case
- Focus, Zoom



1/3 SONY SUPER HAD CCD



COLOR



DAY & NIGHT



FLICKERLESS



30pcs IR LED



VARIFOCAL LENS




IP 66



DC 12V

#### - DIMENSION -

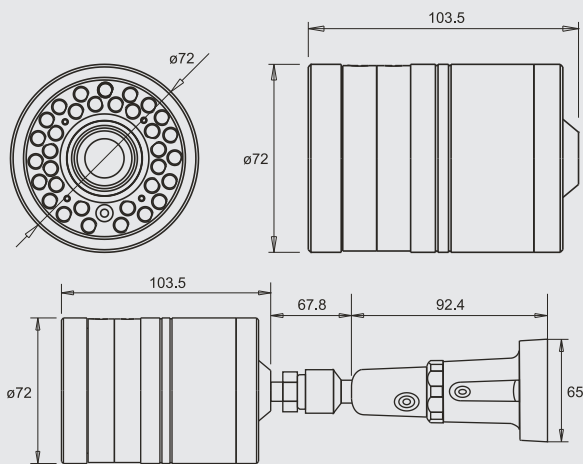

#### - SPECIFICATIONS -

TEC-S30QL		
Signal Format	NTSC	PAL
Horizontal Resolution	540TV Lines	
Image Sensor	1/3" SONY High-Resolution Super HAD CCD	
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Scanning System	2:1 Interlace	
Synchronization	Internal	
Scanning Frequency	15.734 KHz(H), 59.94 Hz(V)	15.625 KHz(H), 50.00 Hz(V)
Video Output	CVBS : 1.0Vp-p/75Ω	
Min. Illumination	Color : 0.3Lux/F1.2, B/W : 0.01Lux/F1.2	
Electronic Shutter	FLK / FIXED / MANUAL / AUTO (1/60 ~ 1/100,000 sec)	FLK / FIXED / MANUAL / AUTO (1/60 ~ 1/100,000 sec)
IRIS Control	DC / MANUAL	
Signal to Noise Ratio	50dB (AGC Off)	
Backlight Compensation	ON / OFF Selectable	
White Balance	ATW / AWB / FIXED / MANUAL	
Gain control	ON / OFF Selectable	
Day & Night	COLOR / BLACK & WHITE / AUTO	
Gamma	Adjustable	
Flickerless	ON / OFF	
Motion Detection	ON / OFF	
Privacy	ON / OFF	
Mirror	ON / OFF	
Sharpness	ON / OFF (Level Adjustable)	
OSD	Built-in (Chinese, English, Japanese, Korean)	
Lens	Varifocal Lens f=4.0~9.0mm (Option : f=2.8~11.0mm)	
LED Qty	30 pcs	
Input Voltage	DC 12V (±10%)	
Power Consumption	LED On : Max. 4.8W / LED Off : Max. 1.2W	
Operating Temp/Hum	Temperature : -10°C to +50°C / Humidity : 20% to 80% RH	
Storage Temp/Hum	Temperature : -20°C to +60°C / Humidity : 20% to 90% RH	
Dimension	72.0(ø) x 103.5(H)mm	
Weight	Approx. 750g	

#### - CABLE LOCATED IN THE BRACKET -

