

TEM-S24HV, TEM-S24V

IP66 14PCS IR LED B/W CAMERA



IP66



- FEATURES -

- 1/3" SONY DSP Super HAD B/W CCD
- TEM-S24HV : 600TV Lines Horizontal Resolution
TEM-S24 : 420TV Lines Horizontal Resolution
- 14pcs IR LED for night vision (Day & Night)
- Visibility Range : 7~10m
- Vari-focal Lens : 4.0~9.0mm/F1.4
- IP 66 Weatherproof Type
- Adjustable Lens without opening case
- Concealed Bracket (Cable Built in the bracket)



1/3 SONY DSP Super HAD CCD



B/W



4.0-9.0mm Varifocal Lens



14pcs IR LED



Day & Night




IP-66



DC 12V

- DIMENSION -

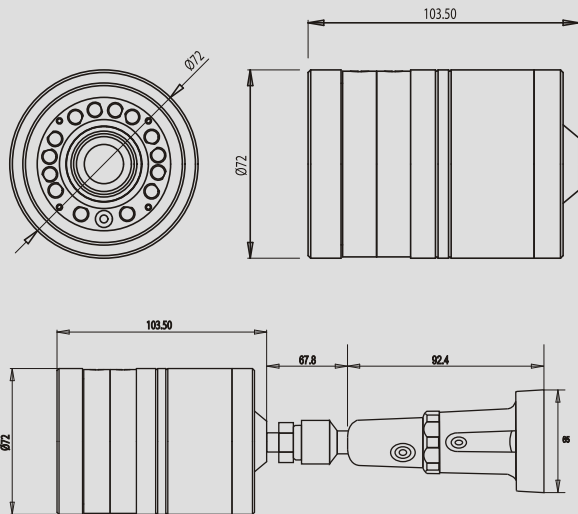

- SPECIFICATIONS -

TEM-S24HV / TEM-S24V		
Signal Format	EIA	CCIR
Horizontal Resolution	TEM-S24HV : 600TV Lines / TEM-S24V : 420TV Lines	
Image Sensor	1/3" SONY DSP Super HAD High-Resolution B/W CCD	
Scanning System	525 lines interlaced	625 lines interlaced
Synchronization	Internal	
Video Output	CVBS : 1.0Vp-p/75Ω	
Min. Illumination	Day : 3Lux, Night : 0.00Lux (IR LED On)	
Signal to Noise Ratio	45 dB or more (AGC Off)	
Gamma	0.45	
AGC	On	
Input Voltage	DC 12V (±10%)	
Power Consumption	IR LED OFF : Max 1.4W or less IR LED ON : Max 5.0W or less	
Operating Temperature	-10°C to +55°C	
Storage Temperature	-20°C to +70°C	
Operating Humidity	Under 90% Non-condensing	
Storage Humidity	Under 90% Non-condensing	
Lens	DC Varifocal Lens : 4.0~9.0mm/F1.4	
Dimension	72(Φ) x 103.5(H)mm	
Weight	690g	
Option	Sunshield	

- Cable located in the bracket -

