

MDW-D2QSW


IP DOME WDR CAMERA




- FEATURES -

- 1CH H.264 / MJPEG Network camera
- High reliability embedded RTOS
- Max 30fps@704x480(D1), Max 25fps@704x576(D1)
- Composite monitor output
- Audio Input : Microphone input
- Audio Output : Speaker output
- Ethernet : 10/100 Base-T, PoE (Option)
- Flexible frame rate and format conversion
- Communication RS-485
- Static / Dynamic IP / Upnp DDNS Client
- RTP Stream Server Support
- Web Browser Viewer
- 1/3" SONY Double Scan CCD
- 600TV Lines Horizontal resolution (B/W : 700TV Lines)
- Excellent low light sensitivity of 0.12Lux @ F1.2 (B/W : 0.012Lux)
- Sens-up : x2 ~ x256 (Color : 0.0004Lux, B/W : 0.00004Lux)
- True Day & Night (ICR)
- Wide Dynamic Range (x128)
- 2D + 3D Digital Noise Reduction
- Digital Image Stabilizer
- Motion Detection 4 Zone (Alarm Output)
- Privacy 8 Zone
- x10 Digital Zoom
- DC Varifocal ICR lens f=2.8~11.0mm

- CONFIGURATION -

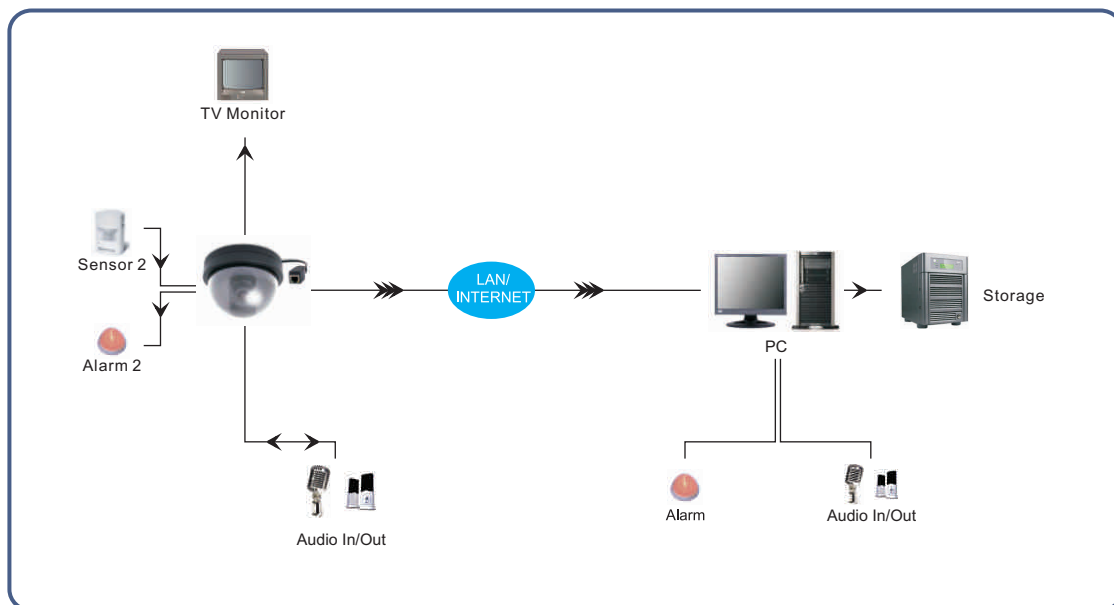

- DIMENSION -

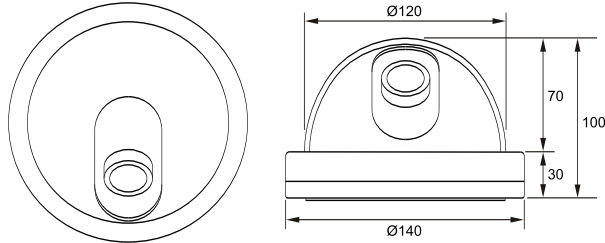

- SPECIFICATIONS -

MDW-D2QSW		
VIDEO	Compression	H.264 / MJPEG
	Video Output	1CH (RJ-45)
	Speed & Resolution	30FPS @ 704x480 / 25FPS @ 704x576
	Monitor Output	Composite output with scale-down
AUDIO	Compression	AMR / G.726 / G.711
	Input / Output	1CH Mic In / 1CH Speaker Out
NETWORK	Protocol	TCP/IP, UDP, DHCP, ARP, DDNS, HTTP, SMTP, FTP, RTP, RTSP, Dynamic IP, Static IP
	Ethernet	10/100 Base Ethernet, RJ-45
	Operating System	Embedded RTOS Engine
EVENT & ALARM	Motion Detection	Motion detection area setup and sensitivity control
	Sensor Input	2
	Alarm Output	2
GENERAL	Communication	RS-485 (Pelco-D, Pelco-P)
	S/W Support OS	Windows 2000, XP, VISTA
	Watchdog	Auto Recovery System
	ETC	Web Browser Viewer and API Support
CAMERA	Image Sensor	1/3" SONY Double Scan CCD
	Min. Illumination	Color : 0.12Lux/F1.2 (Sens-up : 0.0004Lux) B/W : 0.012Lux/F1.2 (Sens-up : 0.00004Lux)
	Signal to Noise Ratio	52 dB
	Backlight Compensation	OFF / BLC / WDR
	White Balance	ATW1 (2,500°K~9,500°K) / ATW2 (1,800~10,500°K) / AWC / MANUAL (3,200°K / 5,600°K)
	Gain Control	MIDDLE / HIGH / LOW
	Digital Noise Reduction	MIDDLE / HIGH / USER / OFF / LOW
	Day & Night	AUTO / EXT / DAY / NIGHT
	Sens-up	x2 ~ x256
	Wide Dynamic Range	x128
	2D + 3D DNR	OFF / ON
	Digital Zoom	OFF / ON (x1 ~ x10)
	Flickerless	OFF / ON
	Motion Detection	OFF / TRACKING / DETECTION (4 Zone, Alarm Output)
	Privacy	8 Zone (Polygonal Method, 4 Points)
	Camera ID	OFF / ON (Max. 54ea / 2Line)
	Reverse	OFF / H / V / HV
	PIP	OFF / ON
	OSD	Built-in (English, French, German, Italian, Japanese, Portuguese, Spanish)
	Lens	DC Varifocal ICR Lens f=2.8~11.0mm
	Input Voltage	DC 12V (±10%)
	Power Consumption	Max. 6.2W / 420mA
Operating Temp/Hum	-10°C to +50°C / 30% to 80% RH	
Storage Temp/Hum	-20°C to +60°C / 20% to 90% RH	
Dimension	140(Ø) x 100(H)mm	
Weight	Approx. 550g	
Option	Poe Receiver	

* Specifications are subject to change without notice.