

TEC-212QL

IP67/12 IR LED COLOR CAMERA



IP 67




- FEATURES -

- 1/3" SONY High-Resolution Super HAD CCD
- 540TV Lines Horizontal Resolution
- Excellent Low Light Sensitivity of 0.3Lux/F1.2
- 12EA IR LED (Visibility Range : 5~10m)
- Day & Night
- Auto White Balance
- Auto Gain Control
- Board Lens f=3.6mm
- IP67



- DIMENSION -

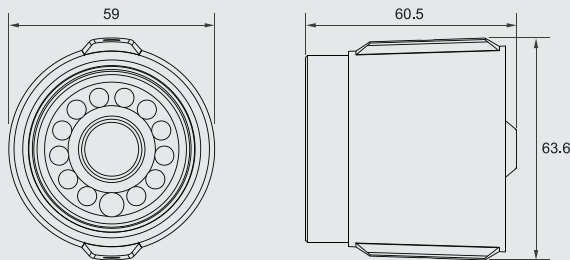

- BRACKET -



- SPECIFICATIONS -

TEC-212QL		
Signal Format	NTSC	PAL
Horizontal Resolution	540TV Lines	
Image Sensor	1/3" SONY High-Resolution Super HAD CCD	
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Scanning System	2:1 Interlace	
Synchronization	Internal	
Scanning Frequency	15.734 KHz(H), 59.94 Hz(V)	15.625 KHz(H), 50.00 Hz(V)
Video Output	CVBS : 1.0Vp-p/75Ω	
Min. Illumination	LED Off : 0.3Lux/F1.2, LED On : 0Lux/F1.2	
Electronic Shutter	1/60 ~ 1/100,000 sec	1/50 ~ 1/100,000 sec
IRIS Control	MANUAL	
Signal to Noise Ratio	48dB or more (AGC Off)	
Backlight Compensation	BLC / FLC (SW)	
White Balance	AUTO	
Gain Control	AUTO	
Gamma	0.45	
Lens	Board Lens f=3.6mm (Option : 6.0 / 8.0mm)	
LED Quantity	12 EA	
Input Voltage	DC 12V (±10%)	
Power Consumption	LED Off : Max. 1.0W / LED On : Max. 3.2W	
Operating Temperature	-10°C ~ +60°C	
Storage Temperature	-20°C ~ +70°C	
Dimension	63.6(Ø) x 60.5(D)mm	
Weight	Approx. 270g (W/ Sunshield)	
Option	Audio	