

MDW-Z2Q23


X23 IP ZOOM CAMERA




- FEATURES -

- 1CH H.264 / MJPEG Network camera
- High reliability embedded RTOS
- Max 30fps@704x480(D1), Max 25fps@704x576(D1)
- Composite monitor output
- Audio Input : Microphone input
- Audio Output : Speaker output
- Ethernet : 10/100 Base-T, PoE (Option)
- Flexible frame rate and format conversion
- Communication RS-485
- Static / Dynamic IP / Upnp DDNS Client
- RTP Stream Server Support
- Web Browser Viewer
- 1/4" Interline Transfer CCD
- 520TV Lines Horizontal Resolution (B/W : 570TV Lines)
- Excellent low light sensitivity of 0.6Lux/F1.6 (B/W : 0.1Lux/F1.6)
- High Durability Built in x23 Optical Power Zoom
- x10 Digital Zoom (Total : x230 Zoom)
- True Day & Night : Filter Switching Mechanism
- Auto Focus / Auto Iris
- RS-485 Supported

- CONFIGURATION -

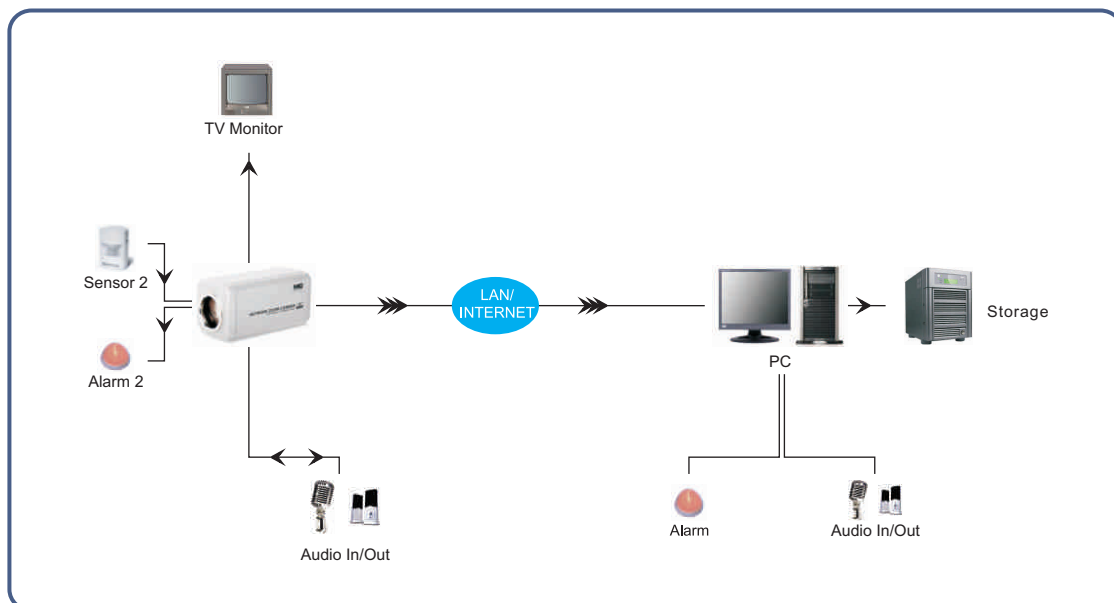

- DIMENSION -

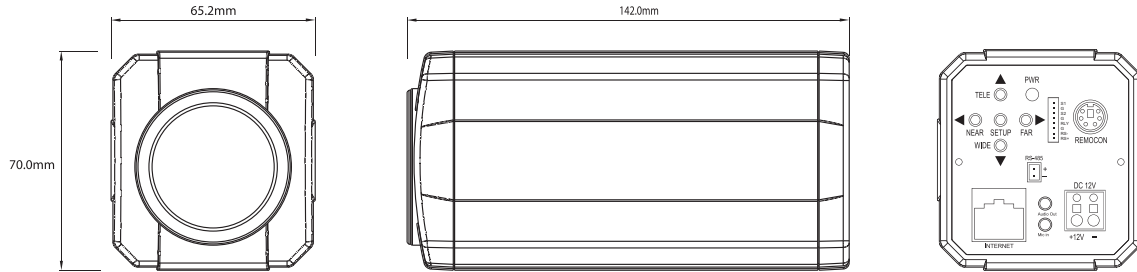

- SPECIFICATIONS -

MDW-Z2Q23		
VIDEO	Compression	H.264 / MJPEG
	Video Output	1CH (RJ-45)
	Speed & Resolution	30FPS @ 704x480 / 25FPS @ 704x576
	Monitor Output	Composite output with scale-down
AUDIO	Compression	AMR / G.726 / G.711
	Input / Output	1CH Mic In / 1CH Speaker Out
NETWORK	Protocol	TCP/IP, UDP, DHCP, ARP, DDNS, HTTP, SMTP, FTP, RTP, RTSP, Dynamic IP, Static IP
	Ethernet	10/100 Base Ethernet, RJ-45
	Operating System	Embedded RTOS Engine
EVENT & ALARM	Motion Detection	Motion detection area setup and sensitivity control
	Sensor Input	2
	Alarm Output	2
GENERAL	Communication	RS-485
	S/W Support OS	Windows 2000, XP, VISTA
	Watchdog	Auto Recovery System
	ETC	Web Browser Viewer and API Support
CAMERA	Image Sensor	1/4" Interline Transfer CCD
	Min. Illumination	Color : 0.6Lux/F1.6, B/W : 0.1Lux/F1.6
	Optics	x23, f=3.84 to 88.4mm (F1.6 to 3.0)
	Min. Focus Distance	1000mm
	Digital Zoom	OFF / ON (Limit x10)
	Angle Field of View	H : Appr. 52.5° (Wide) to 2.36° (Tele) / V : Appr. 40.3° (Wide) to 1.78° (Tele)
	Signal to Noise Ratio	50 dB (AGC Off, Weight On)
	Backlight Compensation	LOW / MIDDLE / HIGH / OFF
	White Balance	ATW (Indoor : 3,000°K~6,500°K / Outdoor : 1,800°K~10,500°K) / AWC / MANUAL
	Gain Control	LOW / MIDDLE / HIGH / OFF
	Digital Noise Reduction	MIDDLE / HIGH / USER / OFF / LOW
	Day & Night	AUTO / EXT / DAY / NIGHT(ICR)
	Digital Image Stabilizer	OFF / ON
	Digital Zoom	OFF / ON (x1 ~ x10)
	OSD	Built-in
	Input Voltage	DC 12V (±10%)
	Power Consumption	Max. 6.2W / 420mA
	Operating Temp/Hum	-10°C to +50°C / 30% to 80% RH
	Dimension	62.5(W) x 70.0(H) x 142.0(D)mm
	Weight	Approx. 600g
Option	Poe Receiver	

* The above specifications can be changed without any prior notification.