

MDW-PT2Q36W


H.264 SPEED DOME NETWORK CAMERA



- FEATURES -

- 1CH H.264 / MJPEG Network camera
- High reliability embedded RTOS
- Max 30fps@704x480(D1), Max 25fps@704x576(D1)
- Composite monitor output
- Audio Input : Microphone input
- Audio Output : Speaker output
- Ethernet : 10/100 Base-T, PoE (Optional)
- Flexible frame rate and format conversion
- Communication RS-485
- Static / Dynamic IP / Upnp DDNS Client
- RTP Stream Server Support
- Web Browser Viewer
- 1/4" SONY EX-View CCD
- Excellent low light sensitivity of 0.3Lux (Color, DSS Off), 0.01Lux (B/W)
- Day & Night (IR Cut Filter)
- WDR : Wide Dynamic Range
- DNR : Digital Noise Reduction
- Power Optical Zoom(x36), Digital Zoom(x12)
- Lightning Speed (Max.360°/sec) & Smooth Manual Speed (Min. 0.05°/sec)
- Endless 360°/sec Pan rotation
- Built-in Fan & Heater
- IP66 Weatherproof System

- CONFIGURATION -

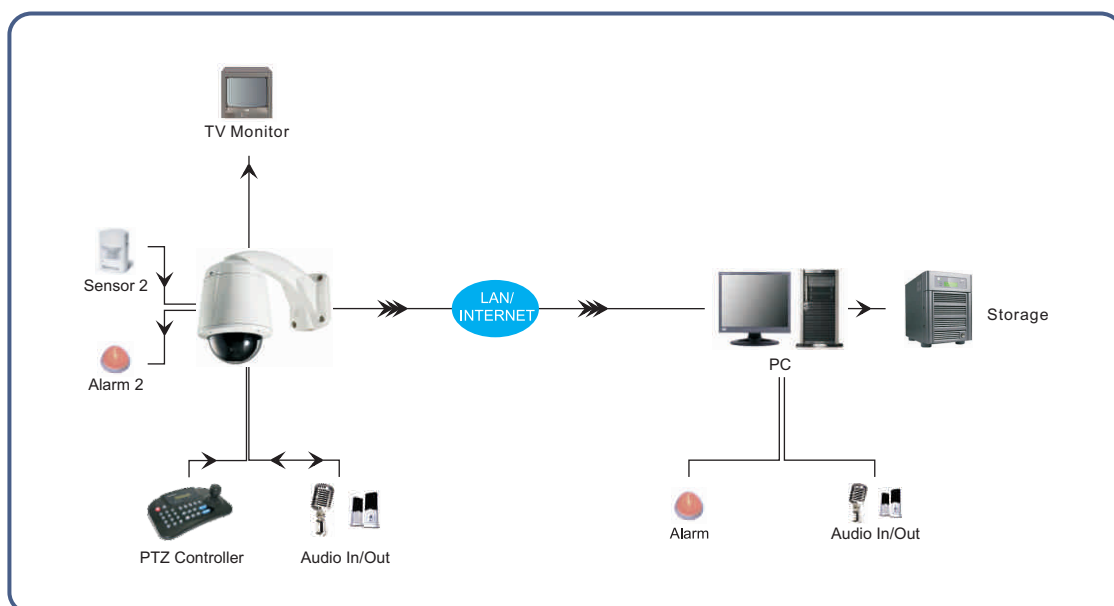

- BRACKET & SUN SHIELD -



- REMOTE CONTROLLER -



WTX-1200A (PTZ CONTROLLER)
* Preset , Group, Tour, Swing, Pattern, Monitor Setting, Menu, Speed Control, Display, Interface convert.

- SPECIFICATIONS -

MDW-PT2Q36W			
VIDEO	Compression	H.264 / MJPEG	
	Video Output	1CH (RJ-45)	
	Speed & Resolution	30FPS @ 704x480 / 25FPS @ 704x576	
	Monitor Output	Composite output with scale-down	
AUDIO	Compression	AMR / G.726 / G.711	
	Input / Output	1CH Mic In / 1CH Speaker Out	
NETWORK	Protocol	TCP/IP, UDP, DHCP, ARP, DDNS, HTTP, SMTP, FTP, RTP, RTSP, Dynamic IP, Static IP	
	Ethernet	10/100 Base Ethernet, RJ-45	
	Operating System	Embedded RTOS Engine	
EVENT & ALARM	Motion Detection	Motion detection area setup and sensitivity control	
	Sensor Input	2	
	Alarm Output	2	
GENERAL	Communication	RS-485	
	S/W Support OS	Windows 2000, XP, VISTA	
	Watchdog	Auto Recovery System	
	ETC	Web Browser Viewer and API Support	
CAMERA	Signal Format	NTSC	PAL
	Horizontal Resolution	550TV Lines	
	Image Sensor	1/4" EX-View CCD	
	Effective Pixels	768(H) x 494(V), 380K Pixels	752(H) x 582(V), 440K Pixels
	Signal to Noise Ratio	52dB (AGC Off)	
	Min. Illumination	Color : 0.3Lux/F1.2, B/W : 0.01Lux	
	Zoom	x36 Optical Zoom and x12 Digital Zoom	
	Wide Dynamic Range	On / Off	
	Digital Noise Reduction	Low / Middle / High / Off	
	Focal Length	F3.4~122.4mm (F1.6~4.5mm)	
	Day & Night	Auto / Day / Night (ICR)	
	Focus	Auto / Manual / Semi-Auto	
	White Balance	Auto / Manual (Red, Blue Gain Adjustable)	
	BLC	On / Off	
	Flickerless	On / Off	
	Range	Pan : 360°(Endless) / Tilt : 95°	
	Pan / Tilt Speed	Preset : 360°/sec / Manual : 0.05°~ 360°/sec (Zoom Proportional) / Swing : 1°~ 180°/sec	
	Preset	128 Presets with Labels	
	Patterns	4 Patterns (Approx. 5 Minutes for each pattern)	
	Swing	8 Swings	
	Group	8 Groups (Max. 20 Entries for Each Pattern)	
	Other Functions	Auto Flip, Auto Parking, Power-up Action & etc	
	Communication	RS-485	
	Protocol	Pelco-D, Pelco-P Selectable	
	Privacy zone	8 Zones	
	Sensor In / Out	4 Input / 2 Output	
	OSD	English On / Off	
Pan / Heater	Built-in		
Power	AC Type : AC 24V / 1.5A		
	DC Type : DC 12V / 2.5A (Option)		
Operating Temp	-30°C ~ 50°C / -22°C ~ 122°C		
Dimension	Dome : 206(Ø) x 235(H)mm / 8.1"(Ø) x 9.2"(H)		
	Housing : 206(Ø) x 235(H)mm / 8.1"(Ø) x 9.2"(H)		
Weight	Approx. 5kg / 11Lbs		

* The above specifications can be changed without any prior notification.